

CERTIFICATE

on the evaluation of recyclability within the paper industry

Heyne & Penke Verpackungen GmbH
Am Burgberg 10
37586 Dassel
DEUTSCHLAND

On the basis of the laboratory analysis and in accordance with the criteria of the PTS method PTS-RH 021:2012 (Draft Oct 2019) the sample described below

Product name	Sample 2: Siegelwachs
Product description	The packaging material Sample 2: Siegelwachs is a printed and both-side coated paper. The paper (40 g/m²) is made of bleached virgin fiber pulp and is coated on both sides ($\Sigma=9$ g/m²). The coating is a bio-based sealing wax.
Product category acc. to PTS-RH 021:2012	II – Packaging products as well as paper and board (for the manufacture of packaging products)
Recyclable percentage¹	> 99 %

is classified as

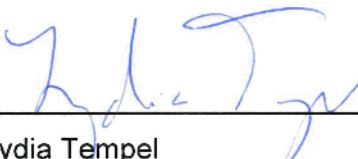

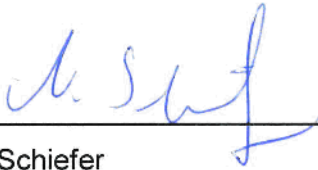
‘Limitedly recyclable due to optical inhomogeneities in the prepared fibre stock. *’

Within standard stock preparation of the packaging paper industry.

*Recyclable in a mixture like the household collection. Cannot be used as a mono-fraction without additional treatment.

This certificate loses its validity in case of qualitative or quantitative changes of the components of the tested sample and is only applicable in connection with the test report No. AB.0003594 dated 16th February 2022.

Heidenau, 28th February 2022

 Lydia Tempel Head of Business Unit Smart & Circular Solutions	 <p>FIBRE based solutions Papiertechnische Stiftung Pirmaer Straße 37 · 01809 Heidenau www.ptspaper.de</p>  Mike Schiefer Method supervisor
--	--

¹ Recyclable percentage (Fibre yield) means the percentage suitable for recycling or usable in papermaking. It corresponds to total mass of the sample (50g oven-dry \pm 100%) less total reject